


CABINETS FOR HYDRANT VALVE




The cabinets are used as a housings of hydrant valves, which are installed on the end of rising pipe of dry / hydrated vertical section in a high buildings, on each floor.

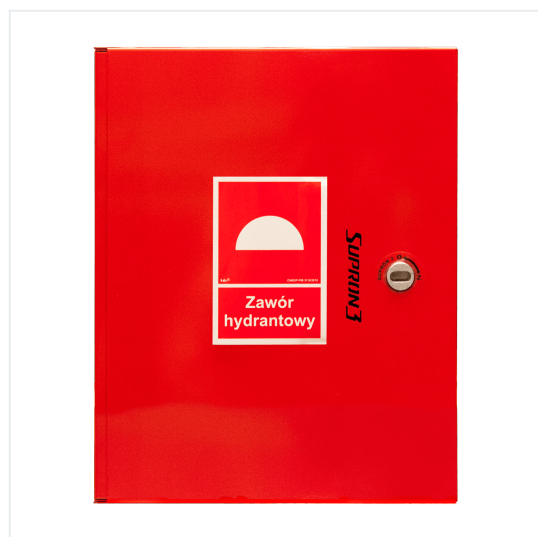

Standard execution:

- Cabinets made of steel sheet lacquered with [Facade type polyester powder paint](#). The cabinets are made in a universal version: the option of choosing a connection from the left or right side and from the top of the cabinet. The standard color is red (RAL 3000) and white (RAL 9003).
- OTS lock – opened by the fireman's ax in the case of valves provided for in the Regulation of the Ministry of Interior and Administration from June 7, 2010 "on the fire protection of buildings, other buildings and areas".



Type	Symbol	Dimensions [mm] (height x width x depth)	Number of valves
Mounted on the wall	SZ N400Z	400 x 320 x 220	1 piece.
	SZ N520Z	520 x 390 x 240	2 pcs.
	SZ N550Z	550 x 550 x 250	2 pcs.
Mounted in recess	SZ N400W	400 x 320 x 220	1 piece.
	SZ N520W	520 x 390 x 240	2 pcs.
	SZ N550W	550 x 550 x 250	2 pcs.